

W24IT3S-SPA2-R

Panel PC de acero inoxidable Intel® Core™ i5-1135G7 IP65 de 24 pulgadas con diseño de esquina redondeada



KEY FEATURES

- Intel® Core™ i5-1135G7 de 11.ª generación a 2,4 GHz (hasta 4,2 GHz)
- Diseño de esquina redonda, Panel PC de acero inoxidable IP65
- Una superficie frontal verdaderamente plana y fácil de limpiar con un diseño de borde a borde
- Sellado a IP65 para protección contra agua y polvo.
- Soporte Guante / Modo Lluvia
- Acero inoxidable SUS 316 / AISI 316 para industrias alimentarias y químicas
- Varias soluciones de montaje
- Unión óptica (opcional)

INTRODUCTION

La serie R de PC de panel Winmate IP65 Stainless combina procesadores Intel® avanzados con un diseño de acero inoxidable resistente, lo que la hace ideal para las industrias de alimentos, bebidas y productos químicos. Disponibles en tamaños de 15" a 24", estas PC cuentan con acero inoxidable SUS 316/AISI 316, un diseño de esquinas redondeadas y una superficie frontal totalmente plana de borde a borde que es fácil de limpiar. Con protección IP65 completa contra agua y polvo, compatibilidad con modo de guantes/lluvia y unión óptica opcional, estas PC de panel garantizan durabilidad, higiene y rendimiento confiable en entornos industriales exigentes.

SPECIFICATIONS

Display

Resolution	1920x1080	Size	24.0 inches
Contrast Ratio	3000:1	Panel Brightness	250.0 nits
View Angles	89,89,89,89	Active Area	527.04x296.46 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)

Mechanical

Dimension	620 x 390 x 56 mm (with junction box) 620 x 390 x 153 mm (without junction box)	Mounting	VESA mount Yoke mount (Optional) Arm mount (Optional)
Enclosure	Stainless Housing	Cooling System	Fanless Design

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C	IP rating	IP65

Certification

Certification	CE, FCC
----------------------	---------

IO Ports

Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for 2 x USB2.0
Serial Port	1 x M12 waterproof connector for RS232	LAN	1 x waterproof Giga LAN RJ45 connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage		

Control

Button	1 x Power Button 1 x Reset Button
---------------	--------------------------------------


Accessory

Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Junction Box Waterproof caps Manual VESA screws
------------------	---

Power

Power Rating	12V DC (M12 type)
---------------------	-------------------

DIMENSIONS UNIT:MM

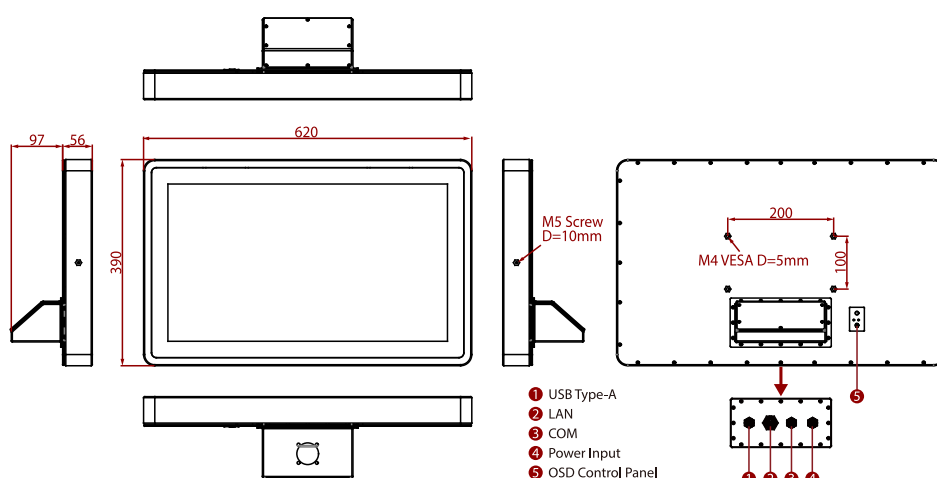

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.
4. For more information about Universal Carrying System Adapter for Winmate Stainless Panel PCs/ Display (with Junction Box), pls reference https://www.winmate.com/Support/Mounting_ARMMount