

TPC-DCS156HE1

**15.6" FHD Industrial Panel PC with Intel J6412;
Front IP65 rated; 2 GbE, 6 USB, 2 HDMI, 2 COM;
Pcap. Touch; DC 12V; 1 M.2 & 1 Mini-PCIe slots.**

Version: 3.2



Features:

- Modular & Fanless designed, aluminum-magnesium alloy;
- Intel Elkhart Lake J6412, Quad-core 2.0Ghz;
- Wide 15.6" TFT LCD Display, LED Backlit, FHD 1920*1080;
- Multi up to 10 points Pcap. touchscreen, EETI controller;
- DC 12V Power input, optional wide DC 9~36V input;
- I/O interfaces: 2 GbE, 3 USB3.0, 3 USB2.0, 2 COM, 2 HDMI, Audio;
- Intel PTT TPM2.0, Support Windows 11 OS;
- Panel mount, VESA 75/100 mount, Front IP65 rated protection;
- Optional 1 M.2 & 1 Mini-PCIe Expansion slots.

Specification




Hardware & System	BIOS	SPI AMI EEI BIOS
	CPU	Intel Elkhart Lake J6412, Quad-core 2.0Ghz, burst to 2.5Ghz, TDP=10W
	Graphic	Intel UHD Graphics for 10 th Gen. Intel Processors
	Memory	SO-DIMM, Support DDR4 2666/2933/3200 Mhz, Max. up to 32GB
	Storage	1* M.2 2280 M-Key (PCIe x2, Gen III NVMe) SSD, 1* 2.5" SATA slot
	Network	1* Intel i226V, 1* Intel i210AT GbE network chips (Optional wireless 3G/4G/LTE, Wi-Fi/BT, 5G/Wi-Fi 6)
	Audio	On-board Realtek ACL 897 Audio controller
	Expansion	1* M.2 B-Key 3052 slot; 1* Mini-PCIe slot
	Watch dog	0 ~ 256 seconds programmable
	Operating System	Win10, Win11, Linux, Ubuntu
I/O Interface	Ethernet	2 RJ45, 10/100/1000 Mbps
	COM	2* RS232 by default (Optional 1* RS485 or 8* GPIO)
	Audio	Mic-In/Line-out (2 in 1, 3.5mm Jack)
	USB	3* USB3.0, 3* USB2.0
	Display	2* HDMI
	Power	1* 2 Pins, Phenix Terminal
LCD Display	Size/Type	Widescreen 15.6" TFT LCD Display
	Resolution	1920 * 1080 (FHD)
	Brightness	450 nits
	Backlit & Lifetime	LED Backlit & 50K hours
	Display Area	344.16 * 193.59 (mm)
	View Angle	89/89/89/89
Touchscreen	Type	Projective capacitive touchscreen
	Touch points	Multi points touch, max. up to 10 points
	Durability	>100 000 000 times
	Surface Hardness	MOHS 6H
	Touch Controller	EETI
	Special Treatment	Anti-Fingerprint (AF)
Structure	Structure & Surface	Magnesium-Aluminum alloy, sand blasting, anodized treated
	Cooling System	Large area finned heatsink (Fanless designed)
	Overall Dimension	395.6 * 247.9 * 57.5 (mm)
	Cut-out Dimension	385 * 237 (mm)
	Net Weight	4.3 KG
	Mount Method	Panel mount, VESA 75/100 Mount
Power & Environmental	Operating temp.	-20 ~ + 70 (°C)
	Storage temp.	-30 ~ + 80 (°C)

TPC-DCS156HE1

Humidity	10 ~ 95% @ 10C (No condensation)
Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
Shock	10G/Peak (11 ms)
Power input	DC 12V (Optional wide voltage DC 9~36V)
Power consumption	About 35W
Certificate	CE/FCC/ROHS

DIMENSIONAL DRAWING:TPC-DCS156E/T

Dimension (mm)

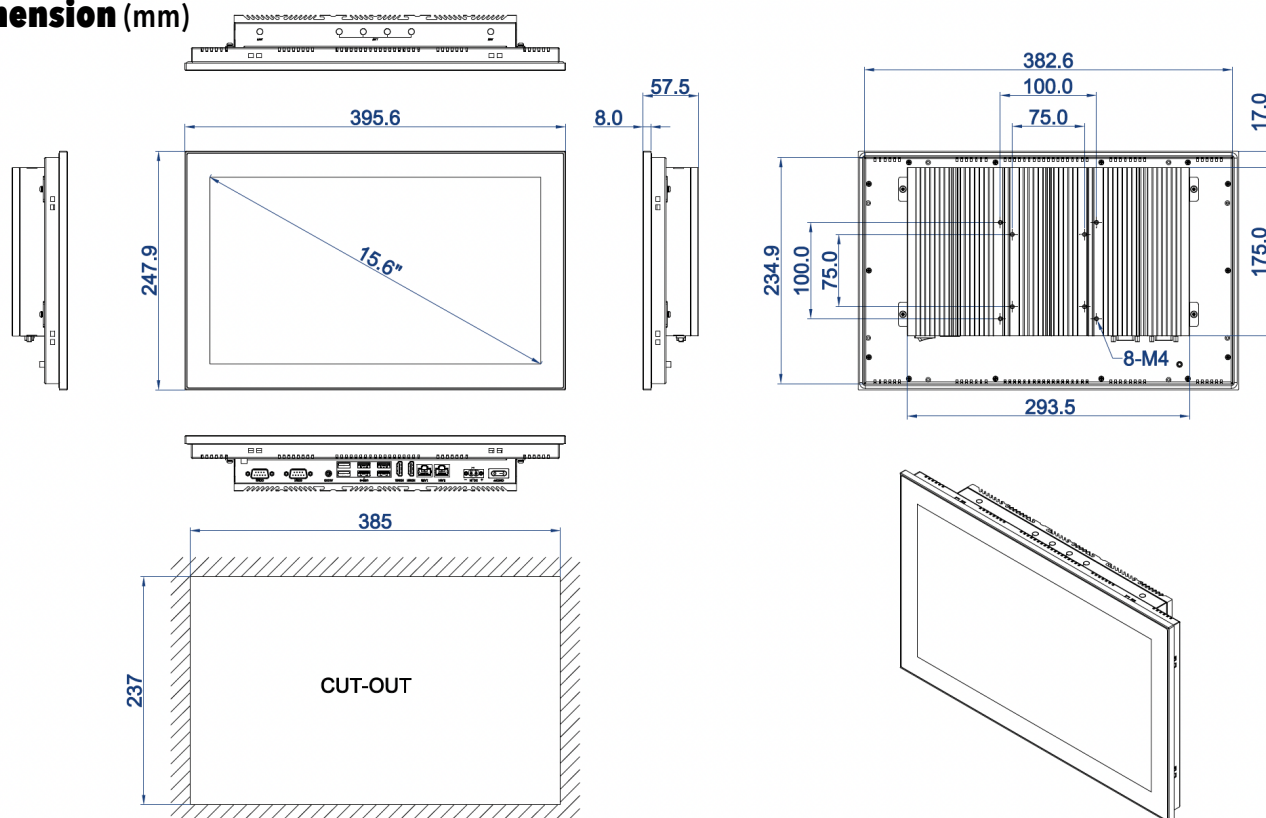

DIMENSIONS IN MILLIMETERS

TAICEN
DATE:2022.10.18
REV:A Unit:mm

Ordering information

Part no.	Description
TPC-DCS156HE1	Wide 15.6" LCD, FHD 1920*1080, Intel J6412, Pcap. Touch, 2 GbE, 3 USB3.0, 3 USB2.0, 2 HDMI, 2 COM, DC 12V, PSU
TPC-DCS156HE1W	Wide 15.6" LCD, FHD 1920*1080, Intel J6412, Pcap. Touch, 2 GbE, 3 USB3.0, 3 USB2.0, 2 HDMI, 2 COM, DC 9~36V, No PSU by default
Optional Accessories	DescriptionPacking List
Memory	SO-DIMM, DDR4, 4GB/8GB/16GB/32GB Standard TPC-DCS156HE1 Panel PC Product1 set
Storage	SSD: 128GB/256GB/512GB/1TB/2TB PSU (Power Supply)1 set
Wireless	Wi-Fi Module, with AntennaPower Cable & Plug1 set
	Wi-Fi Module with BT Integrated, With AntennaPanel Mount Clips (Metal)1 set (8 pieces)
	All Network 4G module, with Antenna
	5G Network module, with Antenna
Power Supply	PSU for TPC-DCS156HE1W (If needed)